



SC-UPC

Patch Cord



Features

- High return loss
- Low insertion loss
- Telcordia style boots
- Compliance with TIA/IEA, IEC, RoHS

Applications

- CATV, Metro, LANs
- Active device termination
- Telecommunication networks
- Industrial, medical, & military


Specifications	UPC (Standard)	UPC (Special)
Insertion Loss	≤0.25dB	≤0.25dB
Return Loss	≥50dB	≥55dB
Operating Temperature	-40 °C to +75 °C	
Durability	≤0.1 dB typical change, 500 matings	
Available Wavelengths	SM=1310 & 1550nm	

Ordering choice

- ▶ Fan-out patch cord
- ▶ Simplex / Duplex Pigtail
- ▶ 12 color Cable
- ▶ Loose & Tight Buffer
- ▶ Boot Color
- ▶ Cable Size
0.9mm, 1.8mm, 2.0mm
3.0mm
- ▶ Packing Style
- ▶ Label Style
- ▶ Bend-insensitive
G652D, G657A
- ▶ OFNR & LSZH & OFNP

SC-APC

Patch Cord

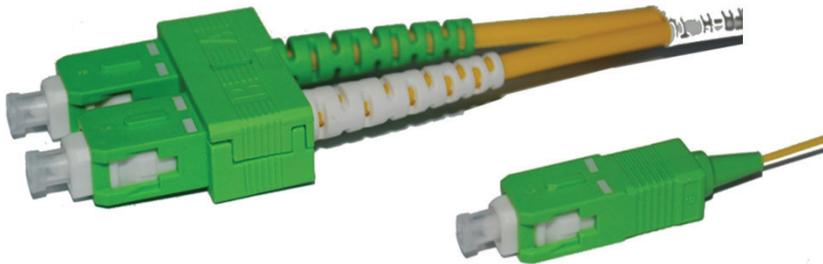

Features

- High return loss
- Low insertion loss
- Telcordia style boots
- Compliance with TIA/IEA, IEC, RoHS

Applications

- CATV, Metro, LANs
- Active device termination
- Telecommunication networks
- Industrial, medical, & military

Specifications	APC (Standard)	APC (Special)
Insertion Loss	≤0.25dB	≤0.25dB
Return Loss	≥60dB	≥65dB
Operating Temperature	-40 °C to +75 °C	
Durability	≤0.1 dB typical change, 500 matings	
Available Wavelengths	SM=1310 & 1550nm	

Ordering choice

- ▶ Fan-out patch cord
- ▶ Simplex / Duplex Pigtail
- ▶ 12 color Cable
- ▶ Loose & Tight Buffer
- ▶ Boot Color
- ▶ Cable Size
0.9mm, 1.8mm, 2.0mm
3.0mm
- ▶ Packing Style
- ▶ Label Style
- ▶ Bend-insensitive
G652D, G657A
- ▶ OFNR & LSZH & OFNP
- ▶ Angle = 8°