


Plug In type

Attenuator

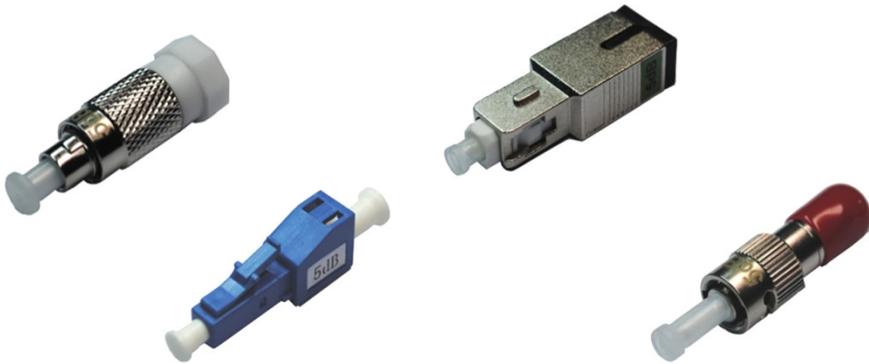

Features

- High durability
- Attenuation levels ranging from 1 to 30dB
- Doped fiber suitable for dual wavelengths
- Compliance with TIA/IEA, IEC, RoHS

Applications

- EDFA, DWDM, Long-haul
- WAN/LAN/Telecommunications
- FTTH/Cable TV
- Gigabit applications (ATM, Ethernet)

Specifications	Single mode	Multi mode	APC
Attenuation Tolerance	1 to 10dB: ± 0.5 dB, 11 to 30 dB: ± 5 %		
Return Loss	≥ 55 dB	≥ 20 dB	≥ 65 dB
Operating Temperature	-40 °C to +75 °C		
Durability	≤ 0.1 dB typical change, 500 matings		
Available Wavelengths	SM=1310 & 1550nm, MM=850nm		

Bulkhead

Attenuator



Features

- High durability
- Attenuation levels ranging from 1 to 30dB
- Doped fiber suitable for dual wavelengths
- Compliance with TIA/IEA, IEC, RoHS

Applications

- EDFA, DWDM, Long-haul
- WAN/LAN/Telecommunications
- FTTH/Cable TV
- Gigabit applications (ATM, Ethernet)

Specifications	Single mode	Multi mode	APC
Attenuation Tolerance	1 to 10dB: ± 0.7 dB, 11 to 30 dB: ± 7 %		
Return Loss	≥ 55 dB	≥ 20 dB	≥ 65 dB
Operating Temperature	-40 °C to +75 °C		
Durability	≤ 0.1 dB typical change, 500 matings		
Available Wavelengths	SM=1310 & 1550nm, MM=850nm		

Ordering choice

- ▶ Attenuation levels
1dB to 30dB
- ▶ SC, FC, ST, LC, MU
UPC & APC type

Ordering choice

- ▶ Attenuation levels
1dB to 30dB
- ▶ SC, FC, ST, LC