

Attenuator

Inline Variable Attenuator Micro-TYPE


Features:

- Environmentally stable
- Easy installation
- Custom designed specifications
- Low return loss
- Readily panel mountable
- Compact packaging



Performance Specifications:

Parameter	Mechanical Variable Micro-Optics Type Attenuators	
	SM	MM
Mode Type	SM	MM
Optical Wavelength, nm	1200 to 1600	850, 1310
Max. Residual Attenuation, dB	1.5	1.5
Min. Attenuation Range, dB	50	30
Max. Resolution, dB	0.1	0.1
Min. Optical Return Loss, dB	55	-
Max. Polarization Sensitivity, dB	0.2	-
Max. Thermal Stability, dB/°C	0.03	-
Max. Optical Power, mW	300	-
Operation Temperature, °C	0 ~ +60	
Storage Temperature, °C	-40 ~ +75	
Packaging Dimension, mm	38 x 30 x 21.5	

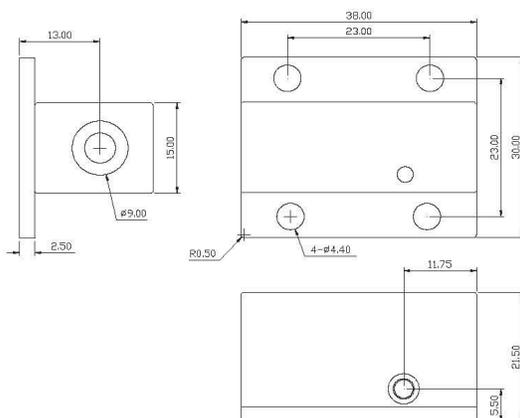

Unit: mm