



Slide Type - SC



Slide Type - FC



Slide Wedge Type



Wedge Type



Buckle Type



- ◆ Can provide a quick and easy termination of fibers in the field.
- ◆ Both SC single mode and multi mode connector options are available for 900 micron and 3mm drop cable application
- ◆ Allowing the installer to terminate and make connection in 3 minutes in the field.
- ◆ This connector system does not require epoxy, adhesive, and costly curing ovens.

Features:

- Field installable, cost effective, user friendly
- No epoxy and polishing required
- Quick and easy fiber termination in the field
- Visual indication of proper termination
- Reliable and superior optical performance

Parameter		Specifications
Connector Type		SC Type
Insertion Loss		(Max 0.5dB)
Reflection		Typical < -40 dB
Tensile Strength	900um	5N
	3.0mm	30N
Connector Durability		< 0.2 dB (After 200 mating)
Operating Temperature		-40°C - +85°C

www.gsrusa.net | 781-687-9191 | sales@gsrusa.net

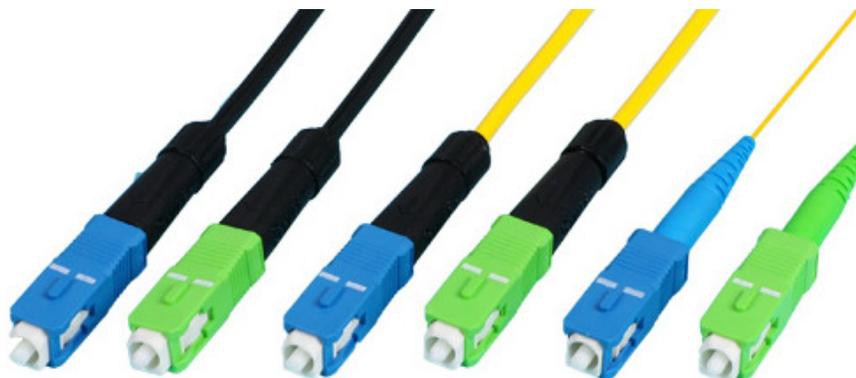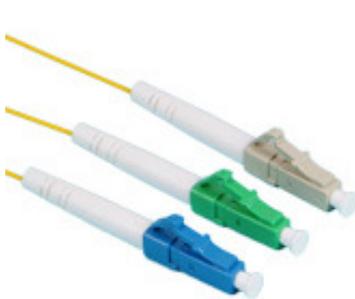

► High Quality Swift Connector can easily be used for FTTH Applications